

Near Field Probe

330 to 500 GHz, WR2.2

DESCRIPTION


The NFP-15-WR2.2 is a high-performance open-ended waveguide probe that operates at the X-band between 330 and 500 GHz. It is manufactured from a single aluminium rod by high accurate manufacturing processes. The opening is sharp to reduce/minimize reflections.

Under client request, all NFPs can include adequate absorber material to reduce backscattering reflections from flanges.

APPLICATIONS




This type of probes is especially suitable for laboratory antenna near field measurements. Moreover, custom bands and radiation pattern data can be requested for probe correction purposes.

Anteral also offers their **CATR** (Compact Antennas Test Range) for measuring antennas at such antenna test facilities.

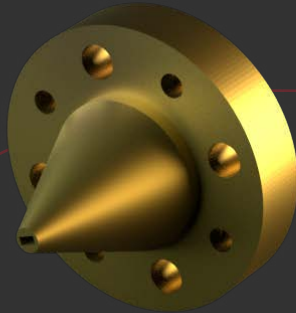

ELECTRICAL SPECIFICATIONS


Parameter	Typical value
Frequency	330 - 500 GHz
Directivity	6.5 dBi
S11	-13 dB

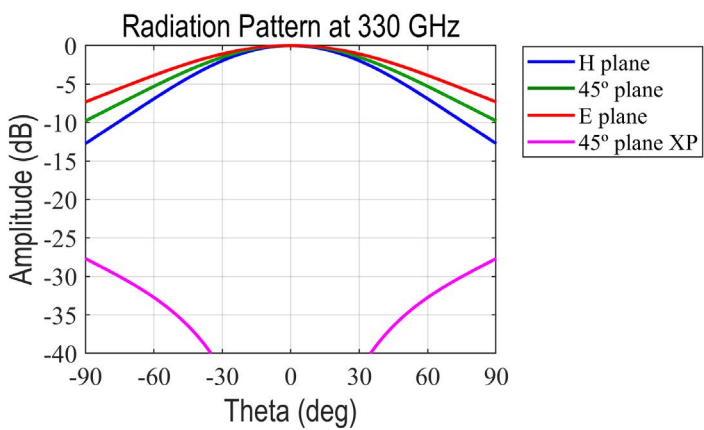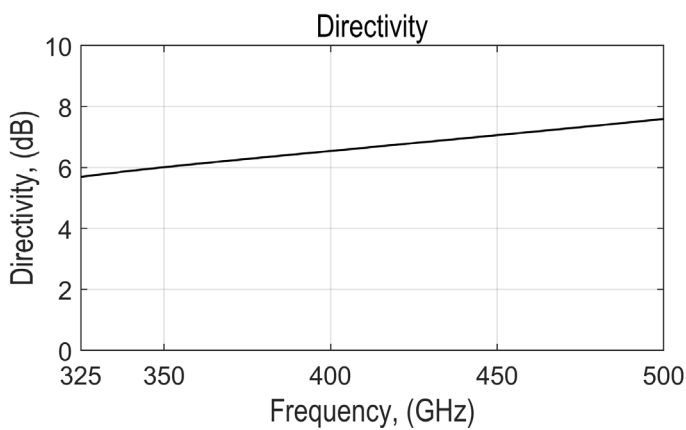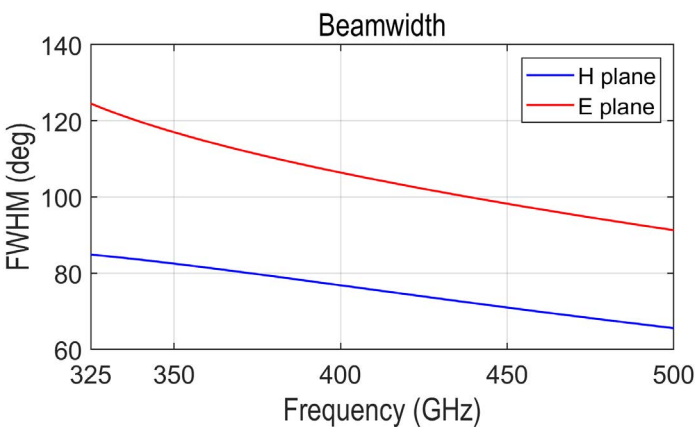

MECHANICAL SPECIFICATIONS

Parameter	Description
Antenna Port	WR-2.2 (0.570 mm x 0.285 mm)
Flange	UG-387/U
Total length	15 mm
Horn Material	Aluminum

MECHANICAL OUTLINE

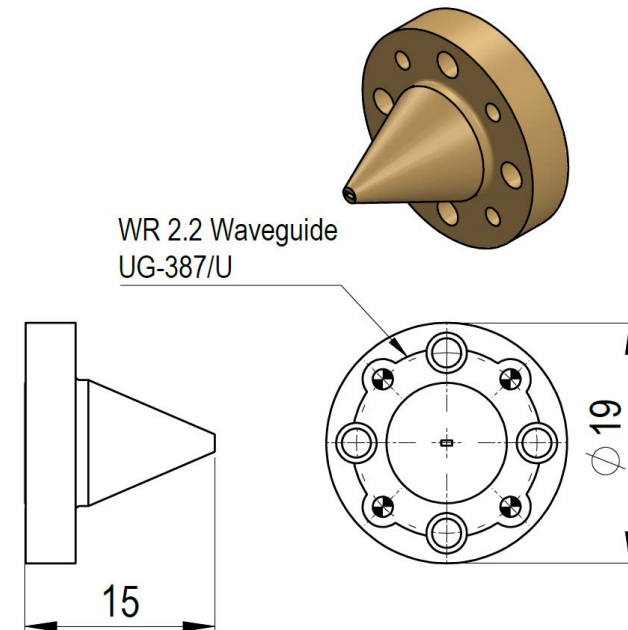

Additional notes

The return loss performance of all items is checked before delivery.

Last version: 09/05/2022.

